


CR 208 P, OR-V 40 P, OR-V 41 P

Pneumatic tensioner and sealers for round packages



- The lightweight and mobile tensioner/sealer combination for heavy-duty applications

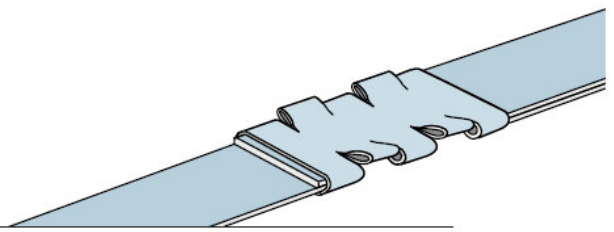

CR 208 P
Tensioner with high tension force



OR-V 40 P
Sealer with single notch seal



OR-V 41 P
Sealer with double notch seal

Technical data	CR 208 P	OR-V 40 P*	OR-V 41 P*
Weight, kg (lbs)	4.1 (9)	2.8 (6.1)	4.7 (10.2)
Tension force, up to approx. N	8400		
Compressed air consumption (6 bar)			
– Tensioning, NI/sec.	6.4		
– Sealing, NI		3	6,4
Seal notches (reverse)		1	2
Steel strap			
Width, mm	19, 25, 32	19, 25, 32	19, 25, 32
(inch)	($\frac{3}{4}$, 1, 1 $\frac{1}{4}$)	($\frac{3}{4}$, 1, 1 $\frac{1}{4}$)	($\frac{3}{4}$, 1, 1 $\frac{1}{4}$)
Standard quality:			
– Strap thickness, mm	0.60–1.00	0.60–1.00	0.60–1.00
(inch)	(.023–.040)	(.023–.040)	(.023–.040)
– Tensile strength, up to N/mm ² (lbs/sq. inch)	850 (120 000)	850 (120 000)	850 (120 000)
High tensile quality:			
– Strap thickness, mm	0.60–1.00	0.60–0.80	0.60–0.80
(inch)	(.023–.040)	(.023–.031)	(.023–.031)
– Tensile strength, up to N/mm ² (lbs/sq. inch)	1100 (157 000)	1100 (157 000)	1100 (157 000)
* According to the use the handle of the sealer can be mounted parallelly or at a right angle to the strap			

