


CR 24 A, CR 25 A, CR 26 A

Pneumatic tensioning and sealing for round packages



- Suitable for a wide range of applications including round and small packages
- Compact

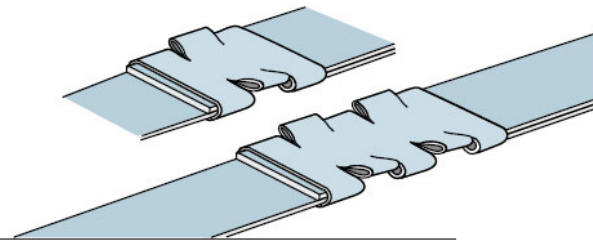

CR 24 A The handy strapping tool for stationary applications

With universal swivelling suspension bow



CR 25 A: Lightweight – can be used with or without a spring balancer

With compressed air inlet

- top-mounted:
for strapping applications with suspended hook or
- rear-mounted:
for strapping applications without suspended hook



CR 26 A The solution for heavy-duty applications

With universal swivelling suspension bow

Technical data	CR 25 A	CR 24 A	CR 26 A
Weight, kg (lbs)	3.2 (7)	7.6 (16.6)	9.3 (20.4)
Tension force, up to approx. N	3000	7000	8400
Compressed air consumption (6 bar)			
– Tensioning, NI/s	4	6,4	6,4
– Sealing, NI	3.4	12	14
Seal notches (reverse)	Single	Double	Double
Steel strap			
Width, mm (inch)	13, 16, 19 (1/2, 5/8, 3/4)	19 (3/4)	25, 32 (1, 1 1/4)
Standard quality:			
– Strap thickness, mm (inch)	0.40–0.63 (.015–.025)	0.60–0.80 (.023–.031)	0.80–1.00 (.031–.040)
– Tensile strength, up to approx. N/mm ² (lbs/sq. inch)	850 (120 000)	850 (120 000)	850 (120 000)
High tensile quality:			
– Strap thickness, mm (inch)	0.40–0.63 (.015–.025)	0.60–0.80 (.023–.031)	0.60–0.80 (.023–.031)
– Tensile strength, up to approx. N/mm ² (lbs/sq. inch)	1100	1100	1100

Cyklop GmbH, Postbox 50 12 20,
50972 Köln, Germany
Industriestraße 133, Rodenkirchen,
50996 Köln, Germany

Phone: ++49(0)2236/602 0,
Fax Sales: ++49(0)2236/602 228
www.cyklop.com,
info@cyklop.com

CYKLOP
INTERNATIONAL

THE
STRAPPING
COMPANY