



OR-H 20 A, OR-H 21 A

Pneumatic tensioning and sealing for flat packages

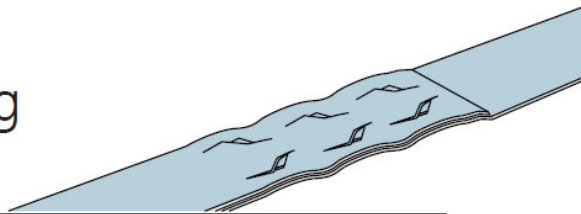

- High performance strapping tools for stationary use
- Control buttons positioned conveniently above the handle

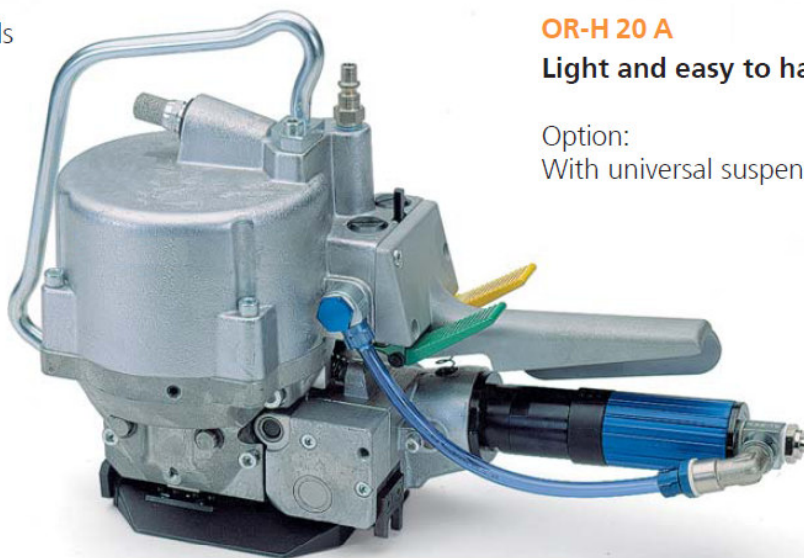

OR-H 20 A

Light and easy to handle

Option:
With universal suspension bow



OR-H 21 A

Compact and light for its performance class

Fitted as standard with swivelling suspension bow



Technical data	OR-H 20 A	OR-H 21 A
Weight, kg (lbs)	9.7 (20)	11.5 (24)
Tension force, up to approx. N	4000	6500
Compressed air consumption (6 bar):		
– Tensioning, NI/s	6	6.4
– Sealing, NI	6	12
Steel strap		
Width, mm (inch)	13, 16 (1/2, 5/8)	16, 19 (5/8, 3/4)
Standard quality:		
– Strap thickness, mm (inch)	0.40–0.63 (.015–.025)	0.40–0.80 (.015–.031)
– Tensile strength, up to approx. N/mm ² (lbs/sq. inch)	850 (120 000)	850 (120 000)
High tensile quality:		
– Strap thickness, mm (inch)	0.40–0.50 (.015–.019)	0.40–0.63 (.015–.025)
– Tensile strength, up to approx. N/mm ² (lbs/sq. inch)	1100 (157 000)	1100 (157 000)